

Taillight Solutions

2014 - 2015 Jeep Grand Cherokee Rear Fog Lamp Installation Supplement

This supplement is for 2014 & 2015 Grand Cherokee models. The 2014-2015 models now have revised taillight assemblies that incorporate LED running lamps. Because of this, the installation for the Rear Fog Lamp kits has changed and the following instructions should be followed.

1. Remove the driver or passenger side taillight assembly and locate the black primary taillight plug that has two wires running to it. This plug is designed to accommodate 3 wires but only uses two wires on the 2014 models.




2. Disconnect the taillight plug from the bulb socket and match up the two plugs with the plugs provided on your rear fog conversion kit. Each plug will connect to the rear fog kit connectors without difficulty.



3. For running lamp / parking lamp functionality on the rear fog lamps you must connect the loose **YELLOW** wire to the **WHITE** wire on the two pin plug directly below the primary

taillight plug. Utilize the supplied T-Tap to securely connect the yellow wire. If this wire is NOT connected your kit will not have any running lamp / parking lamp functions

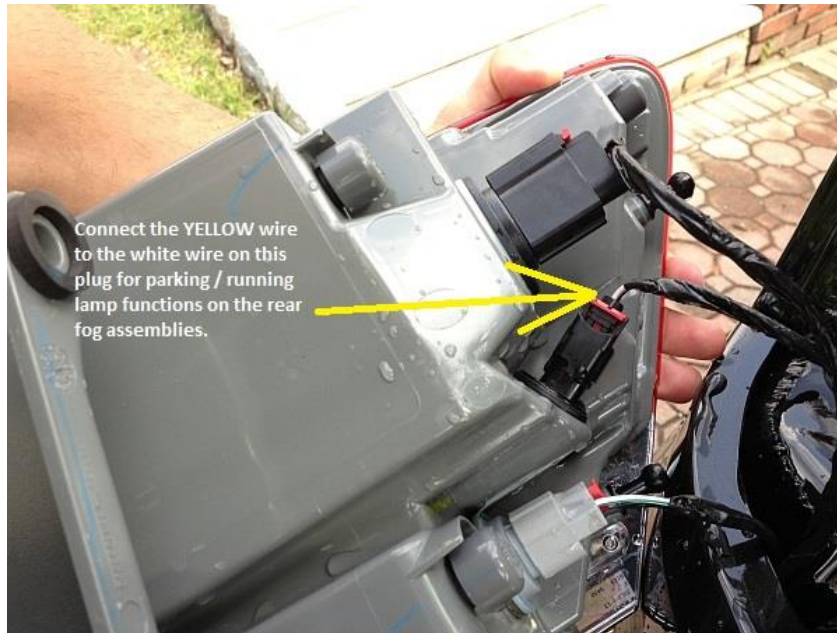

4. Refer to the original WK2 rear fog lamp install manual to complete the remainder of the installation.

www.TaillightSolutions.com